
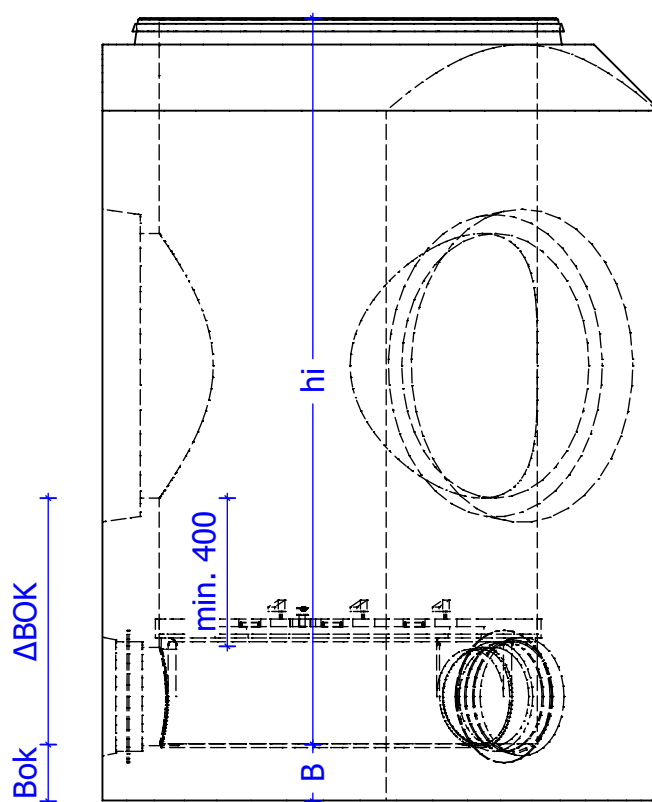


Gecombineerde DWA-RWA inspectieput Ø1000 RWA Ø700-800

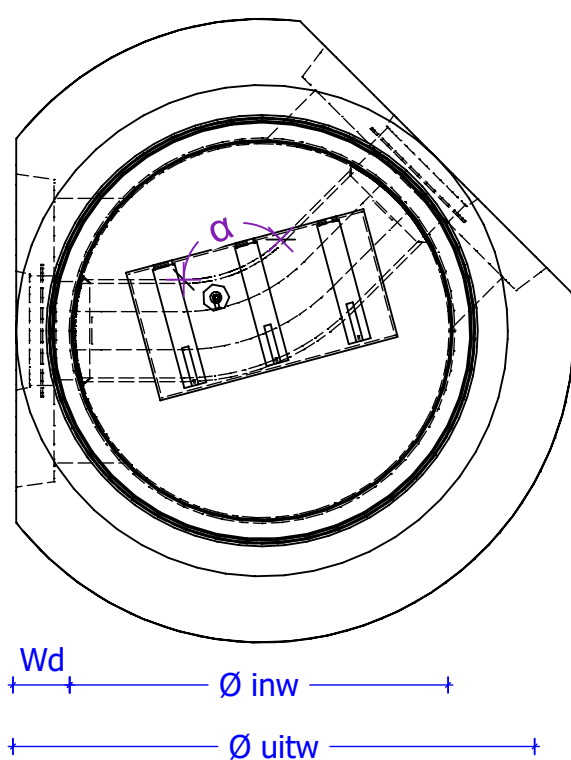

Afmetingen put (mm)	
Øinw	1000
Øuitw	1650
Wanddikte (Wd)	150
bodem (B)	150
Bok	200

Minimale hoek aansluiting (graden)					
	Ø500	Ø600	Ø700	Ø800	
Ø500	76°	76°	76°	85°	
Ø600	76°	76°	85°	90°	
Ø700	76°	85°	90°	100°	
Ø800	85°	90°	100°	106°	

Inw hoogte (hi) (mm)					
	RWA	Ø700	Ø800		
DWA	ΔBOK _{min}	hi _{min}			hi _{max}
Ø250	650	1650	1750	900	2500
Ø300	700	1700	1800	950	2500
Ø400	800	1800	1900	1050	2500

Algemene gegevens:

Alle putten zijn BENOR gekeurd

Milieuklasse: XC4-XA3

Omgevingsklasse: EA3-EE3

Cementsoort: SR-LA

Hijshaken: 2 x KKA 5T

Aansluiting: Beton, Grès, PVC, PP