
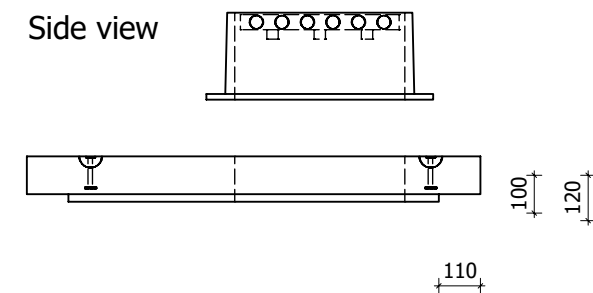
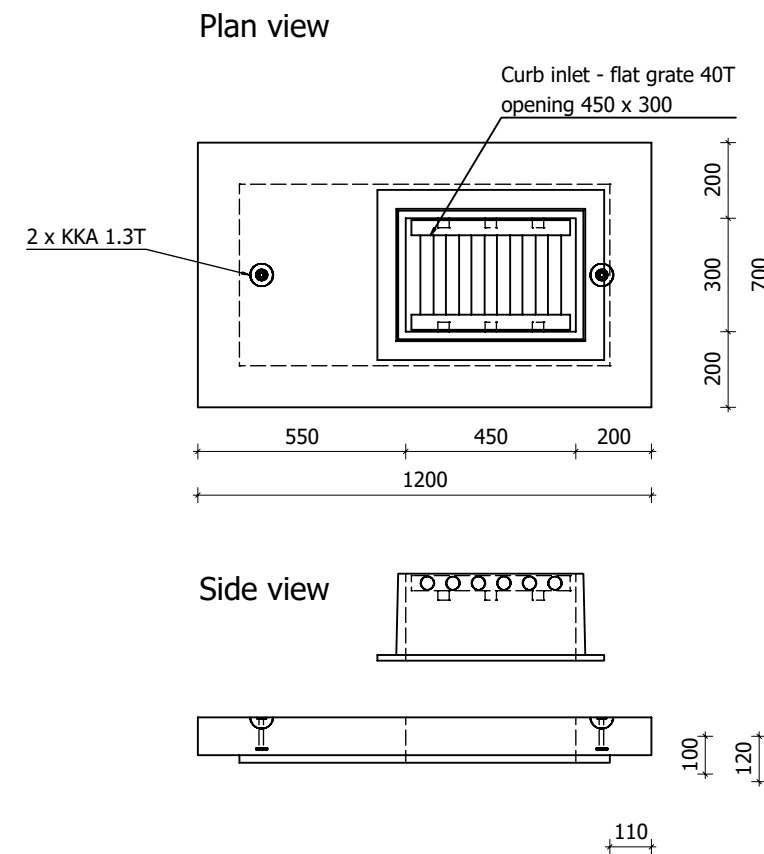
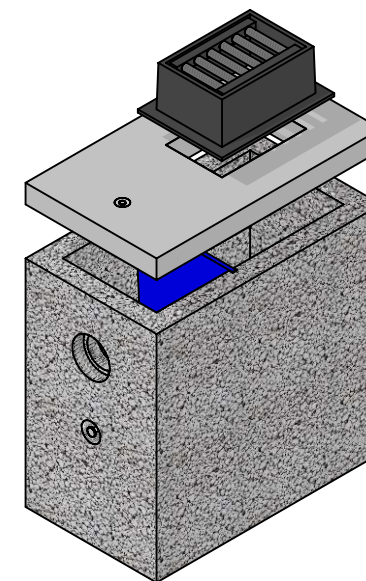
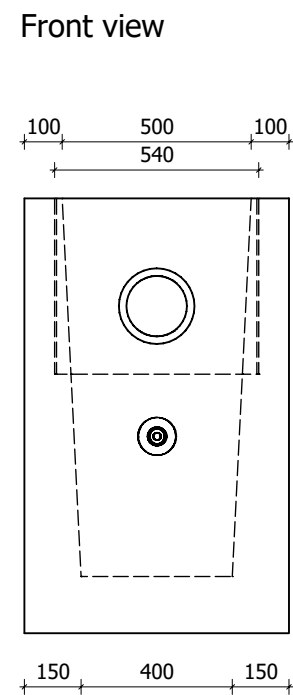
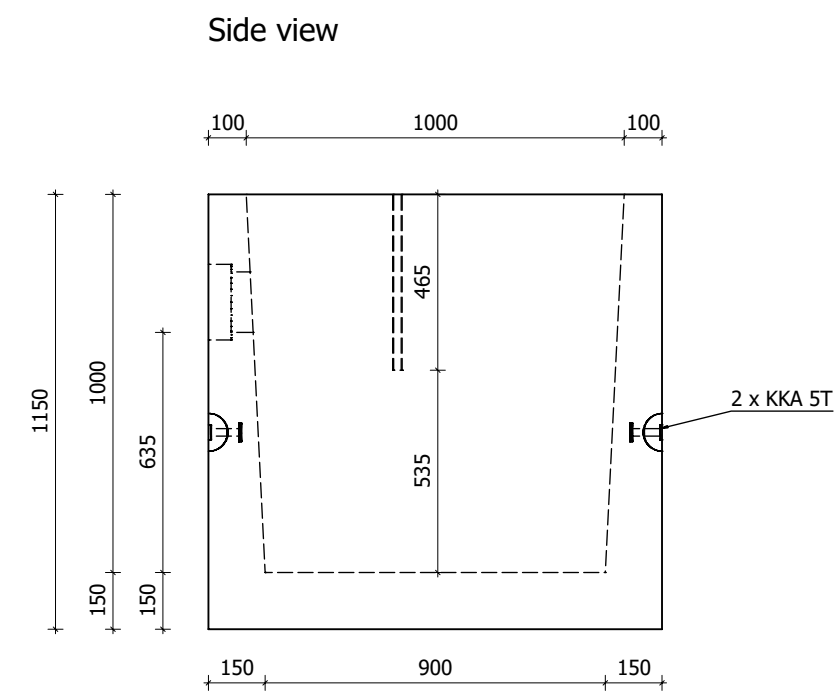


Infiltration gully in porous concrete
type WEBECO

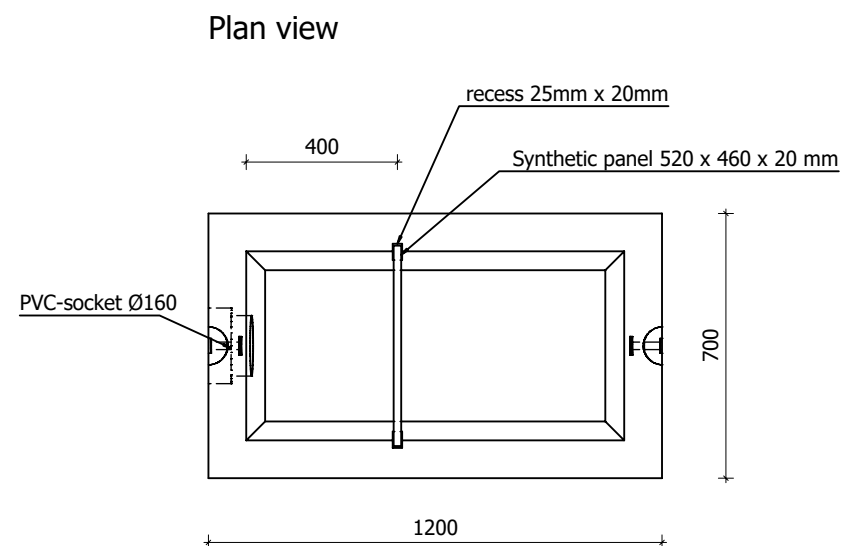

Lichtenberglaan 2090 3800 Sint-Truiden
Tel: +32 (0)11 765 719 info@webeco.be www.webeco.be

Concrete gully : porous
Cover : C40/50
Reinforcement grade: DE 500 BS
Exposure class: XA3-XF1-XC4
form: WEB.025.010 F2 05-01-2009/1

Cement: CEM I 52,5R-SR3 LA
Concrete cover: min 30mm
Environmental class: EA3-EE3

INDEX:

1

revision 00

DATE

14/09/2020

Infiltration gully in porous concrete
type WEBECO

Weight gully : 1150 kg
Weight cover : 200 kg

infiltration surface : 2,0 m²

Infiltration capacity : 1200 l/u

Load class: D400

Name:

Signature:

Administrator:

Draftsman:

Drawing nr:

Units:

mm

Scale:

1:20

The plans for non-standard elements are now approved for production and delivery by the purchaser, who is responsible for obtaining the necessary approval from the principal.