
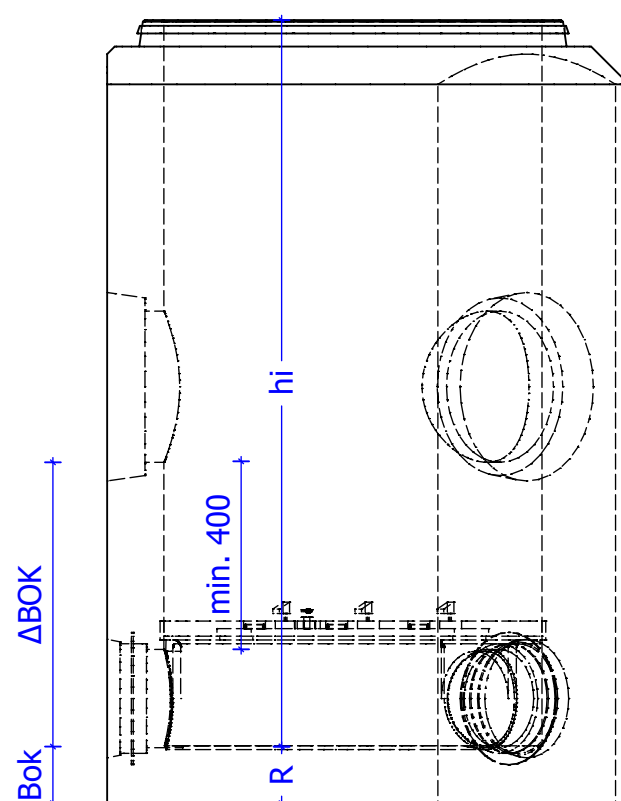


Chambre de visite "combi" DWA-RWA Ø1000 RWA Ø300-600

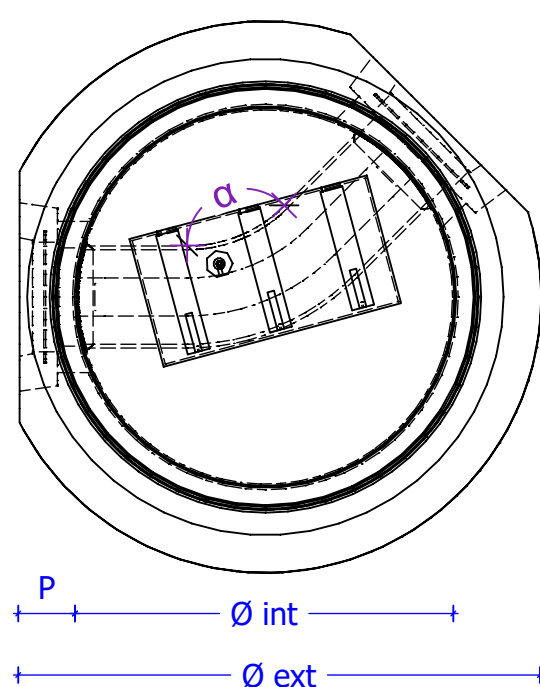

Dimensions (mm)	
$\varnothing \text{ int}$	1000
$\varnothing \text{ ext}$	1460
Paroi (P)	150
Radier (R)	150
Bok	200

Angulaires minimales (degrés)				
	$\varnothing 315$	$\varnothing 400$	$\varnothing 500$	$\varnothing 600$
$\varnothing 315$	65°	65°	65°	65°
$\varnothing 400$	65°	65°	65°	65°
$\varnothing 500$	65°	65°	65°	65°
$\varnothing 600$	65°	65°	65°	75°

Hauteur Interieur (hi) (mm)					
	RWA	$\varnothing 400$	$\varnothing 500$	$\varnothing 600$	
DWA	$\Delta \text{BOK}_{\text{min}}$	hi_{min}			hi_{max}
$\varnothing 250$	650	1350	1450	1550	2500
$\varnothing 300$	700	1400	1500	1600	2500
$\varnothing 400$	800	1500	1600	1700	2500

Info générales :

Toutes les chambres de visite portent le label Benor

Classe environnementale : XC4-XA3

Classe d'exposition : EA3-EE3

Type de ciment : SR-LA

Crochets de levage : 2 x KKA 5T

Raccord : Béton, Grès, PVC, PP